


INSTALLATION INSTRUCTIONS

Multi-Function Floor Drain
地漏安裝說明

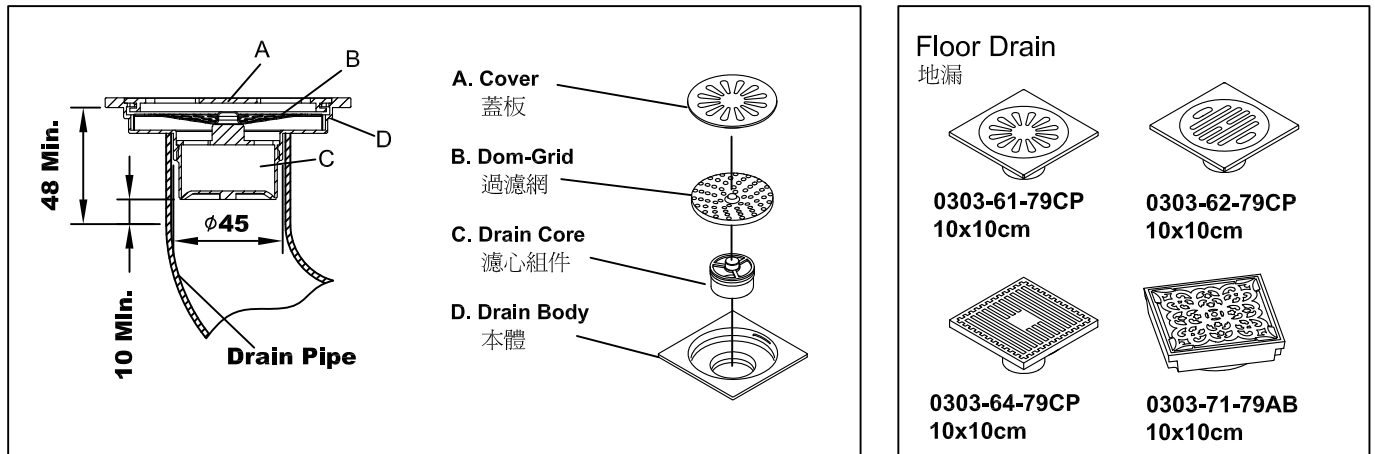

安裝方法 Installation

1. Remove the **Cover**, **Dom-Grid**, **Drain Core** from the **Drain body**.

將蓋板、過濾網及濾心組件，從本體取出。

2. Apply the cement or other sealant around the underside of the flange of **Drain Body**. Place the **Drain Body** into the floor hole and level the **Drain Body**.

Notice : The drain surface should be lower than the floor.

將本體的下沿塗上水泥或適量的密封劑。將本體置入挖好的地漏坑內，排水口與下水道口對中，壓緊並抹平水泥。

注意：平面應稍低於地面少許。

3. Assemble **Drain Core**, **Dom-Grid** and **Cover** into **Drain Body**.

將蓋板、過濾網及濾心組件放入本體內。

4. Remove any excess cement or sealant.

請將地板多餘的水泥或密封劑清除。

安裝注意事項 Installation Attention

1. Inquire for an agent if there is any installing question.

若安裝本產品有任何問題，請向專業人員詢問。

2. Make sure there is at least 10 mm working space from the bottom of **Drain Core** to prevent inactive drain function. (Please see Fig.1)

確認濾心組件底部至彎頭底部至少有10mm空間。(請參照圖示1)

維護方法 Maintenance

Maintenance 1: To clean the grid : please take out the plastic grid and put it back after it is cleaned.

當太多雜物阻塞濾網時，可按步驟1，取出部件清理，清潔後。按步驟3將各部件安裝好，重新使用。

Maintenance 2: To clean the core: please take out the plastic grid and then pull out the core. After clean it, put the core and the plastic grid back.

當自封蓋板結滿水垢影響密封時，可按步驟1，取出蓋板和塑膠過濾網後，將地漏芯組件從不銹鋼本體鉤出清潔後，安裝好重新使用。

產品特點 Product Characters

1. Noise reduced, Qirtight & Beetle stopped, Multi-Function Check-Sealing design.

降低排水噪音，防下水道臭氣和阻止蟲類通行，多功能通止密封設計。

2. Made of SUS 304 Stainless Steel, Brass and Plastic for long operating life.

使用 SUS 304 不鏽鋼、銅和塑膠材料製造，可供長久使用。