


Kitchen Faucet With Sprayer 6772-97-82S1



unit: mm[inch]

- 1.Ceramic valve with CERAMTEC ceramic disc / (Germany)
- 2.Handle can be moved up to 25° to adjust water flow from closed position, hot and cold water controlled by swinging handle for 45° both right and left sides.
- 3.Stainless steel braided hose with SANTOPRENE tube (meets NSF approval), can stand 15Kg/cm² water pressure and 120°C heat.
- 4.Stainless steel braided hose with M10 x 1.0mm (Male thread connect to faucet body) and 1/2"-14NPSM (Female thread connect to water supply system).
- 5.Aerator with removable flow restrictor (2.2 GPM max.), end-user can take off it for larger water flow if necessary.
- 6.Swiveling spout (up to 50,000 turns test).
- 7.Material: Stainless steel with brushed finish.

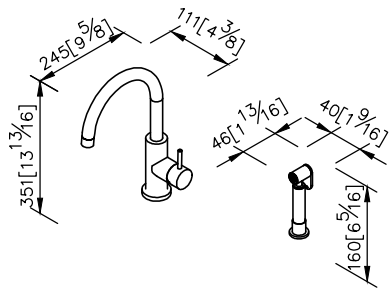