

# INSTALLATION INSTRUCTIONS

## BIDET MIXER & TIP-TOUCH LAVATORY MIXER & SINGLE-HANDLE LAVATORY FAUCET



下身盆龍頭 & 按壓式檯面龍頭 & 檯面龍頭安裝說明

PATENT NUMBER:

專利號碼:

001018899-0001

D 129782

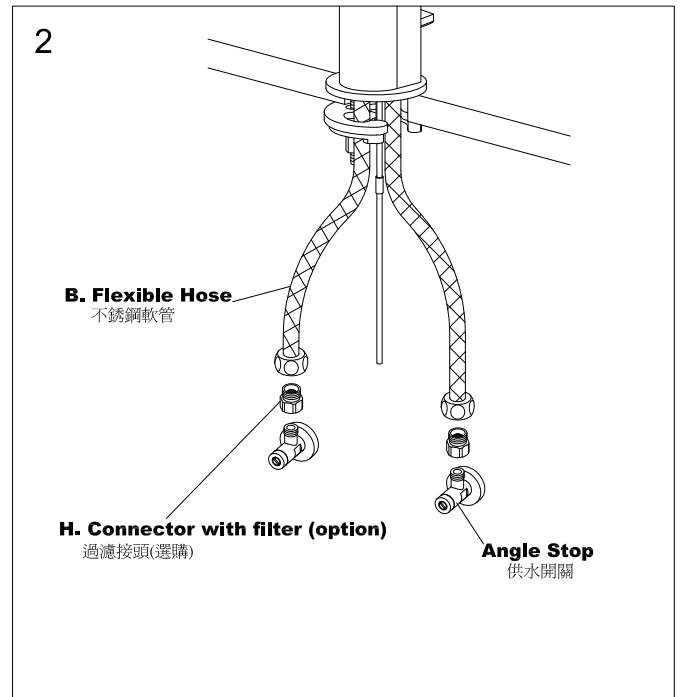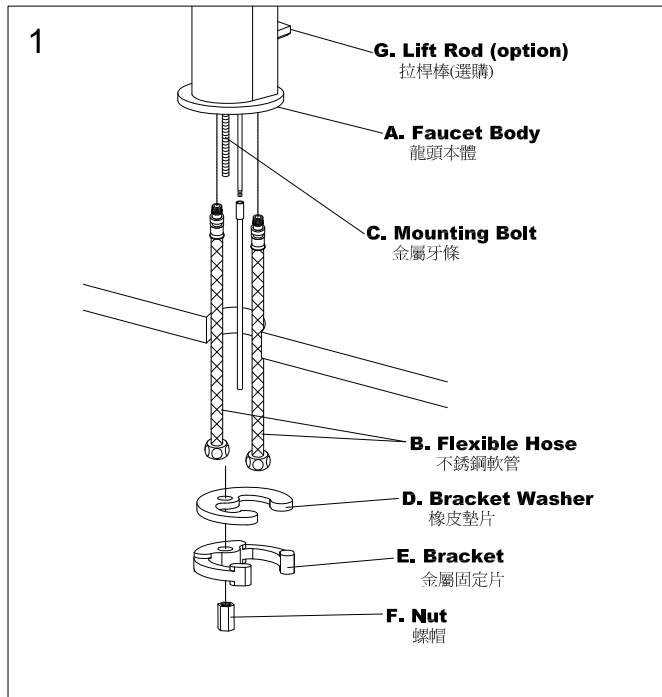

### CAUTION : Risk Of Product Damage.

注意：為增加產品使用壽命，請依說明清潔供水管路。

a./ Turn the angle stops (water suppliers) on and run for 1 minute before connect supply hose (flexible hose) to faucet body. or b./ 安裝編織管之前，先把供水開關全開排水一分鐘。或 b./

b./ Connect and tighten the faucet and angle stops with supply hose (flexible hose) to finish installation, then remove the aerator, fully turn on the hot and cold water valves on faucet and run for 1 minute, then turn off the water and reinstall the aerator.

把龍頭、供水開關及編織管接好並鎖緊之後，把起泡器移開，把熱水及冷水全部轉開一分鐘，然後把水關掉再把起泡器裝回去。

1. Screw **Flexible Hoses** and **Mounting Bolt** into **Faucet Body**. Insert **Flexible Hoses** and **Mounting Bolt** through basin hole in fixture, meanwhile, assemble **Lift Rod** with **Faucet Body**. (Fig.1)

將不銹鋼軟管和金屬牙條鎖緊固定於龍頭本體，再將冷熱進水不銹鋼軟管和金屬牙條穿過洗臉盆(檯)洞口後，準備安裝，同時，把拉桿組裝在龍頭本體上。(圖.1)

2. Position **Faucet Body** on the deck for fixture, then place **Washer** with **Bracket Washer** onto **Faucet Body**, tighten **Nut** securely. (Fig.1)

從龍頭本體下方依序套入橡皮墊片、金屬固定片和螺帽，確認龍頭方向位置後，鎖緊螺帽固定龍頭。(圖.1)

3. Install **Connector with filter** onto the outlet of **Angle Stop** first, then connect **Flexible Hoses** from **Valves** to **Spout** and **Connector with filter**. (Fig.2)

先連接過濾接頭到進水開關，然後連接不銹鋼軟管從閥體到出水口及過濾接頭。(圖.2)

## FIXING CONTENTS

組配件內容

