

# INSTALLATION INSTRUCTIONS

## 6875-9Q YES 洗滌器安裝說明


1. Insert Rubber Washer into Hose (Option), and then connect Sprayer and Angel Stop (Water supply) with Hose (Option).

將墊圈裝入噴槍蛇管並用噴槍蛇管連接供水處1/2G及噴槍。



Insert Filter Gasket before assemble with Hose to stop sealing structure from damaging by dirt. Filter Gasket should be cleaned and reassembled as the flow rate is getting down.

一定要先將濾網墊片裝入蛇管再將蛇管鎖上,以避免雜質卡於噴槍內部造成使用失效. 如果水量變小可將濾網墊片拆下清洗後再裝上。

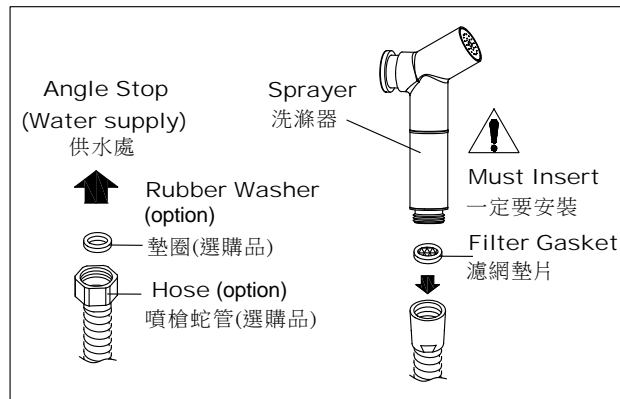

## MAINTAINING

### 維護方式

1. To clean the plastic meshes cover, please using 4mm Hex Key to remove the plastic meshes cover only as attached figure shown.

清潔噴灑頭塑膠蓋，使用 4mm六角扳手拆卸或安裝噴灑頭塑膠蓋。

## CAUTION

### 注意事項



1. Do not remove inner metal seal. Reassembly the inner metal seal parts may cause the sprayer to lose function or damage the sprayer.  
請勿取出內部金屬止水零件。重新組裝內部金屬止水零件，可能導致噴槍功能失效或嚴重損壞噴槍。
2. Do not overtighten the plastic meshes cover when reassemble, or may damage the hex hole of plastic meshes cover.

重新裝置噴灑頭塑膠蓋時，請勿過度鎖緊，損壞塑膠六角內孔。

