

Two-Handle Valve 7880-9H-82CP


INTRODUCTION:

The slender and contrasting handles are one of the main themes of the whole series. Combined with the cylindrical water outlet, it shows the overall static stability. The visual effect of simple lines brings soothing enjoyment to the body and mind, allowing users to wash off the exhaustion in the bathroom space.



DESCRIPTION:

- 1.The body of valve should be buried in the wall beforehand with 1"(2.5cm) adjusting tolerance in depth.
- 2.The connecting thread of main body is G 1/2.
- 3.Handle valve turning range from closed position: 90°
- 4.The inlet of both sides are assembled the check valves for avoiding the backflow of cold and hot water.
- 5.Material of body meets JIS 3771 standard.
- 6.Brass with chrome-plated; SC2 standard of ASTM for 5 years guarantee; pass 96 hours Salt Spray Test.

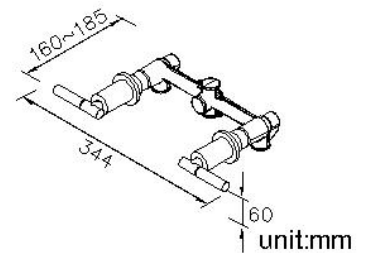

Certification:

Fixing Kits:

- 1.

AWARD: